




Fiber Optic Systems Technology Inc.

FT 3405 Sensor Monitor

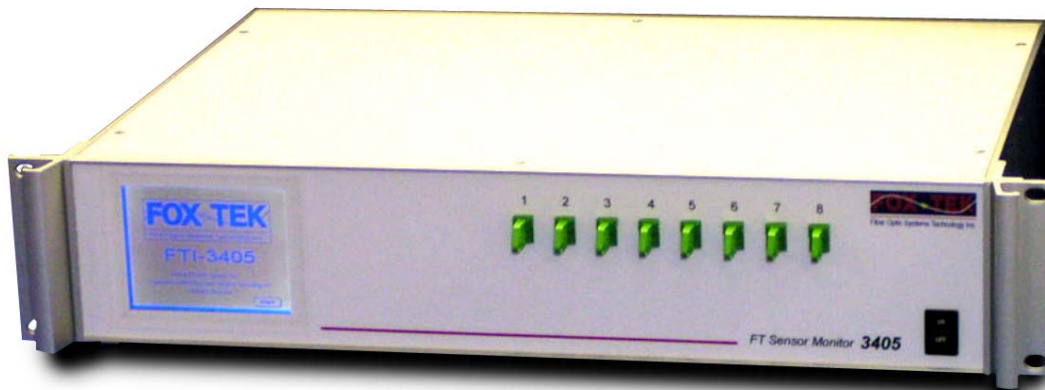

Specifications

Dimensions (W x D x H)	17" x 17" x 5.5" (excluding mounting brackets) 19" rackmount, 3U high
Weight	4.6 kg / 10.1 lbs
Operating Environment	Designed for indoor use. Do not expose to condensing humidity. Operating temperature: +15°C to +35°C (59°F to 95°F)
Storage Temperature	-20°C to +65°C (-4°F to 149°F)
Number of Channels	Eight (8)
Compatible Sensor Lengths	Up to three compatible sensor lengths available per monitor
Scan Times (per channel)	30-40 seconds (full scan) 5 seconds (typical window scan)
Measurement Range	± 15 mm
Operating Accuracy	< 0.5% of full-scale (0.2% typical)
Resolution	1 µm
Display	LCD Touchscreen (3.8" diagonal)
Interface	Ethernet
Power Requirements	110 V / 2 A or 220 V / 1 A, 50-60 Hz
Fuse	250 V / 1.6 A (5x20 mm CSA C22.2 No. 248.14 or UL 248-14)

For more information please contact FOX-TEK @ (416) 665-2288

www.fox-tek.com

Specifications subject to change without notice
© 2006 Fiber Optic Systems Technology Inc. All rights reserved.